

ZHEJIANG HANGCHA IMP. & EXP. CO., LTD.

Factory site: 666 Xiangfu Road, Hangzhou, Zhejiang, China (311305)

Tel: +86-571-88926735 88926755 Fax: +86-571-88926789 88132890

sales@hcforklift.com www.hcforklift.com





IS014001:2015



WeChat







YouTube

Forklift" App

 ${\sf HANGCHA\,GROUP\,CO.,LTD.}\ reserves\ the\ right\ to\ make\ any\ changes\ without\ notice\ concerning$ colors, equipment, or specifications detailed in this brochure, or to discontinue individual models. The colors of trucks, delivered may differ slightly from those in brochures.




A series pallet truck mini range III

with capacities of 1,500/2,000kg



A series pallet truck mini range III

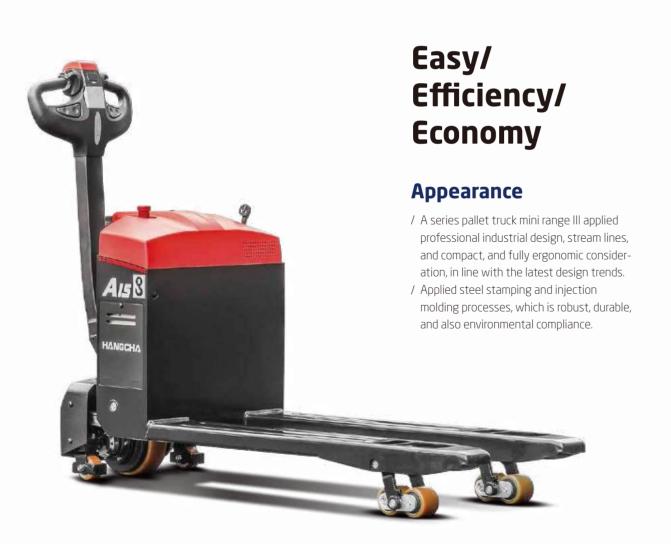

High Performance

- / Rated capacity 1500-2000kg, meet the needs of the majority of customers.
- / Powered by traction motor not only has good acceleration and perfect performance, but also low heat.
- / Regenerative braking for battery recovery during travel speed reduction, anti-slope on gradient.
- / All key parts such as tiller, switches, connectors, battery indicator and hour meter all adopt the famous brand.

/ Make the operator feel comfortable, all the operation

/ Optimized designing structure to offer a good visibility

/ Built-in charger and maintenance free gel battery

/ The compact body and semicircular design provide an

walking upright greatly increases the convenience in

/ Standard fork height 80mm, equipped the guide device easy to get in pallets (including sealing pallets).

ideal operation in limited space, and the ability of

can be completed by one hand.

and easy entrance of the pallet.

adopted to provide convenient usage.

/ Side battery change is standard feature.

- / Three braking system of regenerative braking, reverse
 - / Anti-slope on gradient can keep the safety.

Safety

- / The emergency button on the tiller head can effectively avoid the harm to the driver.
- protect the pump motor from damaging dramatically and more energy saving.

- current braking, parking brake, insures the safe opera-

- / The standard equipped electronic lifting limitation

Maintenance

- / Built-in charger and maintenance free gel battery, you don't need to worry about them.
- / Integrated battery indicator, hour meter and self-diagnostic instrument.
- / Full opened hood, easy accessibility of all components, is easy for service.
- / All shafts installed lubricated shaft sleeve and oil cup, provide convenient maintenance and long service life.

Standard specification

- / Permanent magnet drive motor
- / Emergency switch
- / Multi-function battery indicator
- / PU wheel
- / 1150mm fork length
- / 560mm outside fork width
- / Electronic lifting limitation
- / Non-contact proximity switch
- / Horn
- / Maintenance free battery
- / Internal charger
- / Walking upright
- / Additional wheel
- / Tandem load wheel

Options

/ Different length of fork / Different width of outside fork











Reliability

Comfort

- / 5-pivot design provide longer working life.
- / Imported waterproof connectors, all wires and cables are protected, greatly improve the reliability of the electric system.
- / Top quality hydraulic power unit applied to provide low noise, low vibration, smooth lifting and landing reliable
- / Punch formed forks to provide more strength and tip guide to provide higher efficient operation.
- / Using non-contact proximity switch, improves safety and reliability.